





Simply moving.

## DOLLIES

- 188 *Simply moving.*
- 189 *Dollies for dimensions  
400 x 300 mm  
400 x 400 mm  
600 x 400 mm*
- 192 *Dollies for dimensions  
800 x 600 mm  
1200 x 800 mm*
- 193 *Distribution dolly*

## DOLLIES




# Simply moving.

## *Heavy loads made easy*

Often, heavily laden plastic containers have to be transported manually within a company due to internal operational procedures. On our load-bearing transport dollies, loads of several hundred kilos can be transported quickly and easily.

The smooth-running and powerful casters reduce the effort required to a minimum.

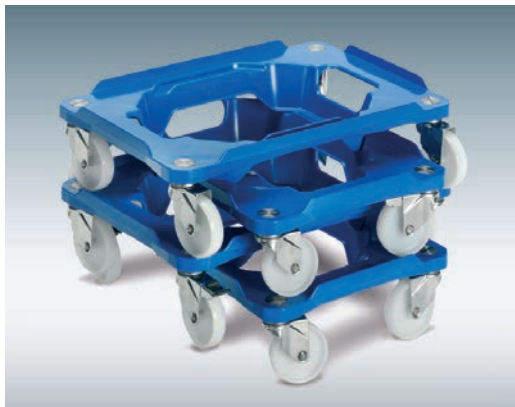

## *Stackable transport dollies*

These transport dollies for example, are nestable inside one another after a 90° rotation.



## 400 x 300 mm



Standard colour  
 dark grey

**External dimensions:** 380 x 280 x 135 mm  
**Ground clearance:** 100 mm  
**Area load:** up to 100 kg  
**Weight:** 2.8 kg

Article code	Version	Casters
80-270-0	plastic	4 steering casters Ø 75 mm, thereof 1 with brake
80-270-20	plastic	4 steering casters Ø 100 mm, thereof 1 with brake
80-270-40	plastic	4 steering casters Ø 125 mm, thereof 1 with brake

## 400 x 400 mm



**External dimensions:** 400 x 400 x 120 mm  
**Ground clearance:** 105 mm  
**Area load:** up to 100 kg  
**Weight:** 4.5 kg

80-168-1	metal, galvanised	4 steering casters Ø 75 mm
----------	-------------------	----------------------------

## 600 x 400 mm



Standard colour  
 light grey

**External dimensions:** 600 x 400 x 175 mm  
**Ground clearance:** 110 mm  
**Area load:** up to 400 kg  
**Weight:** 4.8 kg

The transport dollies can be stacked on top of each other after a 180° rotation (except dollies with 4 casters).

80-55-26	plastic	2 fixed and 2 steering casters with rubber tyre Ø 100 mm, thereof 1 with brake
80-55-20	plastic	4 steering casters with rubber tyre Ø 100 mm, thereof 1 with brake
80-55-21	plastic	4 steering casters with rubber tyre Ø 100 mm
80-55-46	plastic	2 fixed and 2 steering casters with rubber tyre Ø 125 mm, thereof 1 with brake



Standard colour  
 dark blue

**External dimensions:** 615 x 415 x 165 mm  
**Ground clearance:** 64 mm  
**Area load:** up to 120 kg  
**Weight:** 2.9 kg

The transport dollies can be stacked on top of each other after a 90° rotation.

80-50-20.1	plastic ABS	4 steering casters with rubber tyre Ø 100 mm, thereof 1 with brake
80-50-70.1	plastic ABS	4 polyamid steering casters Ø 100 mm, thereof 1 with brake
80-50-70 INOX	plastic ABS, metal parts INOX	4 polyamid steering casters Ø 100 mm, thereof 1 with brake



Casters with different diameters, made of other materials and with or without brake are available on request.

Stock items (SKU), for all other items please request the minimum order quantities.

## 600 x 400 mm



Standard colour  
 dark grey

**External dimensions:**  
586 x 386 x 135 mm  
**Ground clearance:**  
95 mm  
**Area load:**  
up to 150 kg  
**Weight:** 3.2 kg

Article code	Version	Casters
80-156-0	plastic	4 steering casters Ø 75 mm, thereof 1 with brake
80-156-20	plastic	4 steering casters Ø 100 mm, thereof 1 with brake
80-156-40	plastic	4 steering casters Ø 125 mm, thereof 1 with brake
80-156-21	plastic	4 steering casters Ø 100 mm



Standard colour  
 dark grey

**External dimensions:**  
582 x 382 x 135 mm  
**Ground clearance:**  
95 mm  
**Area load:**  
up to 150 kg  
**Weight:** 3.6 kg

80-151-0	plastic	4 steering casters Ø 75 mm, thereof 1 with brake
80-151-20	plastic	4 steering casters Ø 100 mm, thereof 1 with brake
80-151-40	plastic	4 steering casters Ø 125 mm, thereof 1 with brake
80-151-61	plastic	4 polyamid steering casters Ø 75 mm



**External dimensions:**  
580 x 380 x 120 mm  
**Ground clearance:**  
105 mm  
**Area load:**  
up to 150 kg  
**Weight:** 4.6 kg

80-171-0	metal, galvanised	4 steering casters Ø 75 mm, thereof 1 with brake
80-171-20	metal, galvanised	4 steering casters Ø 100 mm, thereof 1 with brake
80-171-40	metal, galvanised	4 steering casters Ø 125 mm, thereof 1 with brake
80-171-61	metal, galvanised	4 polyamid steering casters Ø 75 mm

On request also available in stainless steel (if ordered in sufficient quantities).



**External dimensions:**  
600 x 400 x 120 mm  
**Ground clearance:** 88 mm  
**Area load:** up to 200 kg  
**Weight:** 2.6 kg

80-185-52	plastic	4 steering casters Ø 75 mm
-----------	---------	----------------------------



Casters with different diameters, made of other materials and with or without brake are available on request.

Stock items (SKU), for all other items please request the minimum order quantities.

## 600 x 400 mm



**External dimensions:** 610 x 410 x 500 mm  
**Usable space**  
**lower tier:** 600 x 400 x 425 mm  
**Ground clearance:** 105 mm  
**Area load:** up to 150 kg  
**Weight:** 12.4 kg

Article code	Version	Casters
80-175-1	metal, galvanised	4 steering casters Ø 75 mm



**External dimensions:** 580 x 380 x 880 mm  
**Ground clearance:** 105 mm  
**Area load:** up to 150 kg  
**Weight:** 7.7 kg

80-111-1	metal, galvanised	4 steering casters Ø 75 mm
----------	-------------------	----------------------------

## DOLLYFIX



*Connectable  
dollies*

**External dimensions:** 600 x 462 x 230 mm  
**Ground clearance:** 120 mm  
**Area load:** up to 250 kg  
**Weight:**  
 with push bar: 13.6 kg  
 without push bar: 6.2 kg

Also suitable for stacking containers

80-57-T41H	plastic, with push bar	4 steering casters Ø 100 mm, thereof 1 with brake, mechanism for connecting the dollies
80-57-41A	plastic, without push bar	4 steering casters Ø 100 mm, mechanism for connecting the dollies



Casters with different diameters, made of other materials and with or without brake are available on request.

Stock items (SKU), for all other items please request the minimum order quantities.



## 800 x 600 mm



Standard colour  
 black

**External dimensions:**  
800 x 600 x 200 mm  
**Ground clearance:**  
120 mm  
**Area load:**  
up to 500 kg  
**Weight:** 7.8 kg

The transport dollies can be stacked on top of each other after a 180° rotation.

Article code	Version	Casters
80-184-185 R	plastic	2 fixed and 2 steering casters Ø 125 mm
80-184-186 R	plastic	2 fixed and 2 steering casters Ø 125 mm, thereof 1 with brake
80-184-41 R	plastic	4 steering casters Ø 125 mm



**External dimensions:**  
733 x 498 x 185 mm  
**Internal dimensions:**  
725 x 490 mm  
**Ground clearance:**  
150 mm  
**Area load:**  
up to 300 kg  
**Weight:** 13.4 kg

80-172-4	metal, galvanised to fit space-saving container Article code 8-301 (see page 203)	4 steering casters Ø 125 mm, thereof 1 with brake
----------	--	---



**External dimensions:**  
814 x 621 x 185 mm  
**Ground clearance:**  
150 mm  
**Area load:** up to 300 kg  
**Weight:** 12.7 kg

80-912	metal, galvanised	4 steering casters Ø 125 mm, thereof 1 with brake
--------	-------------------	---



**External dimensions:**  
800 x 600 x 233 mm  
**Ground clearance:**  
140 mm  
**Area load:**  
up to 400 kg  
**Weight:** 9.0 kg

9-9024-1	plastic, without push bar, for stackable and nestable boxes	4 steering casters, thereof 2 with brake
89-9-200	metal push bar to slide in	

## 1200 x 800 mm



Standard colour  
 black

**External dimensions:**  
1200 x 800 x 200 mm  
**Ground clearance:**  
120 mm  
**Area load:** up to 500 kg  
**Weight:** 16.0 kg


80-954-85	plastic	2 fixed and 2 steering casters Ø 125 mm
-----------	---------	---

Stock items (SKU), for all other items please request the minimum order quantities.

## Distribution dolly



Standard colour dolly  
 red brown

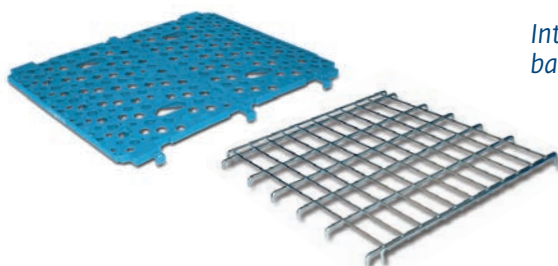

## Scissor dolly for cylindrical containers



## Dolly for tub



Article code	Version	Casters
80-002	consisting of: - distribution dolly - 2 frames - 2 textile straps the set is delivered unmounted	
<p><b>External dimensions with frame:</b> 815 x 670 x 1683 mm  <b>Weight:</b> 13.4 kg</p> <p><i>Dolly</i></p> <p><b>External dimensions:</b> 815 x 670 x 183 mm  <b>Usable internal dim.:</b> 806 x 606 mm  <b>Ground clearance:</b> 150 mm  <b>Area load:</b> up to 300 kg  <b>Weight:</b> 8.1 kg</p> <p><i>Frame</i></p> <p>89-15-1 metal, galvanised usable height: 1500 mm</p> <p><i>Frame for rear wall</i></p> <p>89-15-9 metal, galvanised usable height: 1500 mm</p> <p><i>Textile strap</i></p> <p>89-11-200 polyester, dimensions: 830 x 25 mm</p> <p><i>Intermediate base</i></p> <p>89-3-15 plastic, load capacity: 150 kg              89-15-10 metal, galvanised load capacity: 150 kg</p>		
80-200-105	plastic	2 fixed and 2 steering casters Ø 100 mm
80-200-105.5004	plastic	2 fixed and 2 steering casters Ø 100 mm, smooth running casters
80-173	metal, galvanised	4 steering casters Ø 50 mm
80-770-4	metal, galvanised, to fit multi-purpose tub no. 9-770 (see page 231)	4 steering casters Ø 75 mm

Stock items (SKU), for all other items please request the minimum order quantities.