


clever – creative – sustainable – smart



utz EUROTEC

utzgroup.com

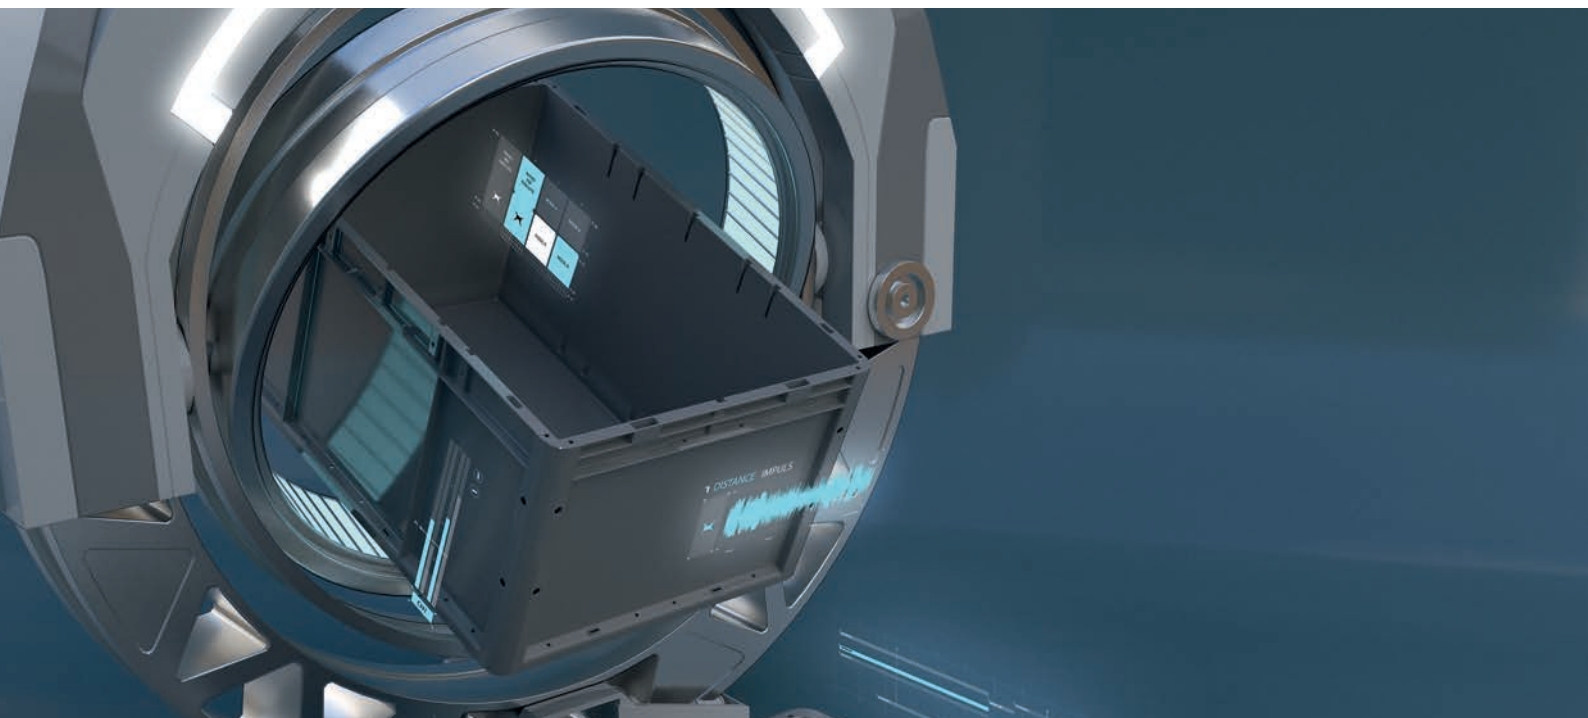

Conveyed automatically


High-tech container for automatic handling

The EUROTEC is predominantly suitable for automatic handling on all conventional storage and conveyor systems.

The EUROTEC has a large number of points for robots to grab on to or where an automatic conveyor system can be positioned. Recessed grips and handle holes also permit manual container handling.



This is supplemented by a selection of base variations, so that warping of the base and resulting faults in the conveyor system caused by adjusted container loads can be excluded.

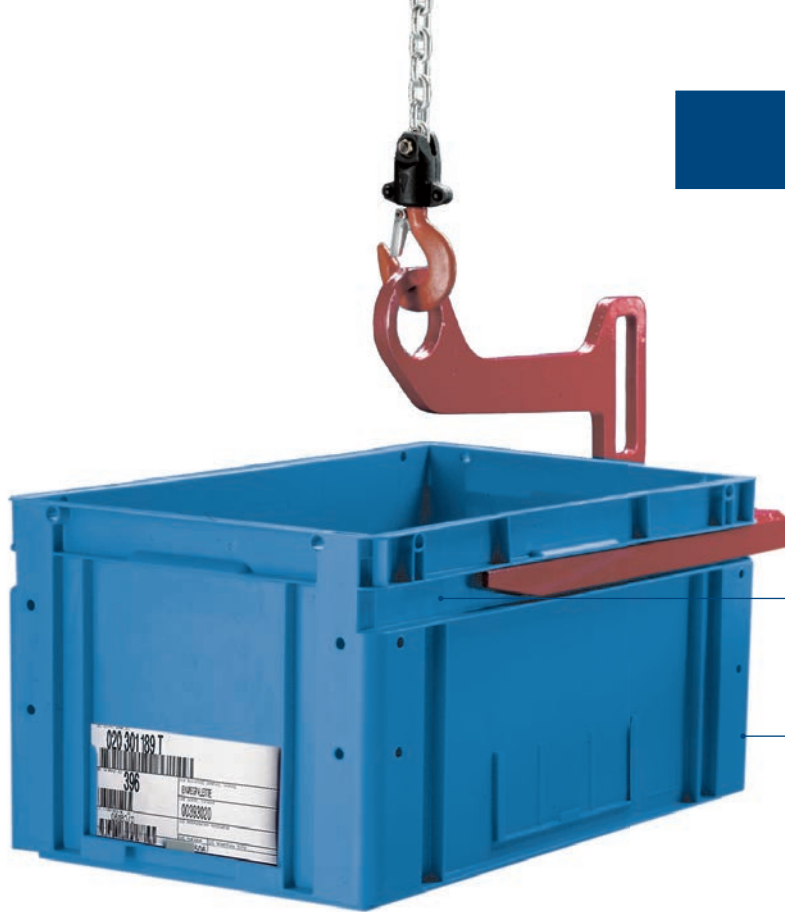

U-channel

- A continuous indentation in the upper part of the sidewalls
- This is the interface for the gripper arms which move the container into a specified position

Double-walled corners



Horizontal take-up

- Four cylindrical openings in the upper rim of the sidewalls.
- The container can be lifted automatically with round bars inserted into these openings.



Lower pulling channel

- Opening in the lower rim of the short sides.
- Interface for the automatic conveyor system to pull or push the container.



Vertical take-up

- Opening in the upper container rim.
- This enables a conveyor device to lift the container.




Grip sleeve

- Vertical indentation in close proximity to the corner area.
- Interface for the grip sleeves to pull or push the container.

Partition panel guide


For safe guidance of the partition panels

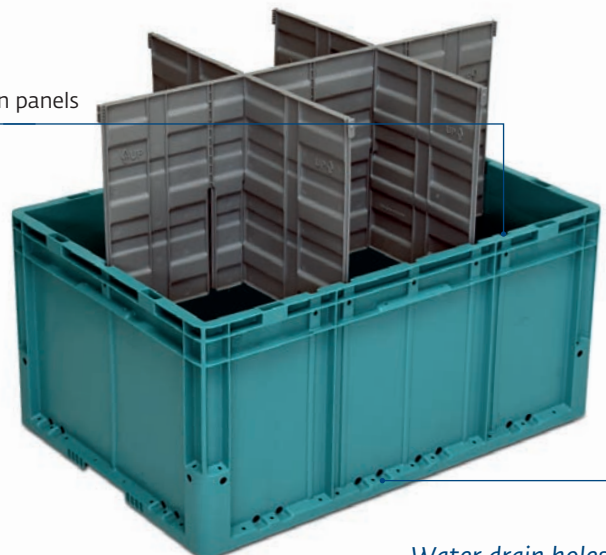


Water drain holes

Base variations


Bases for high surface loading

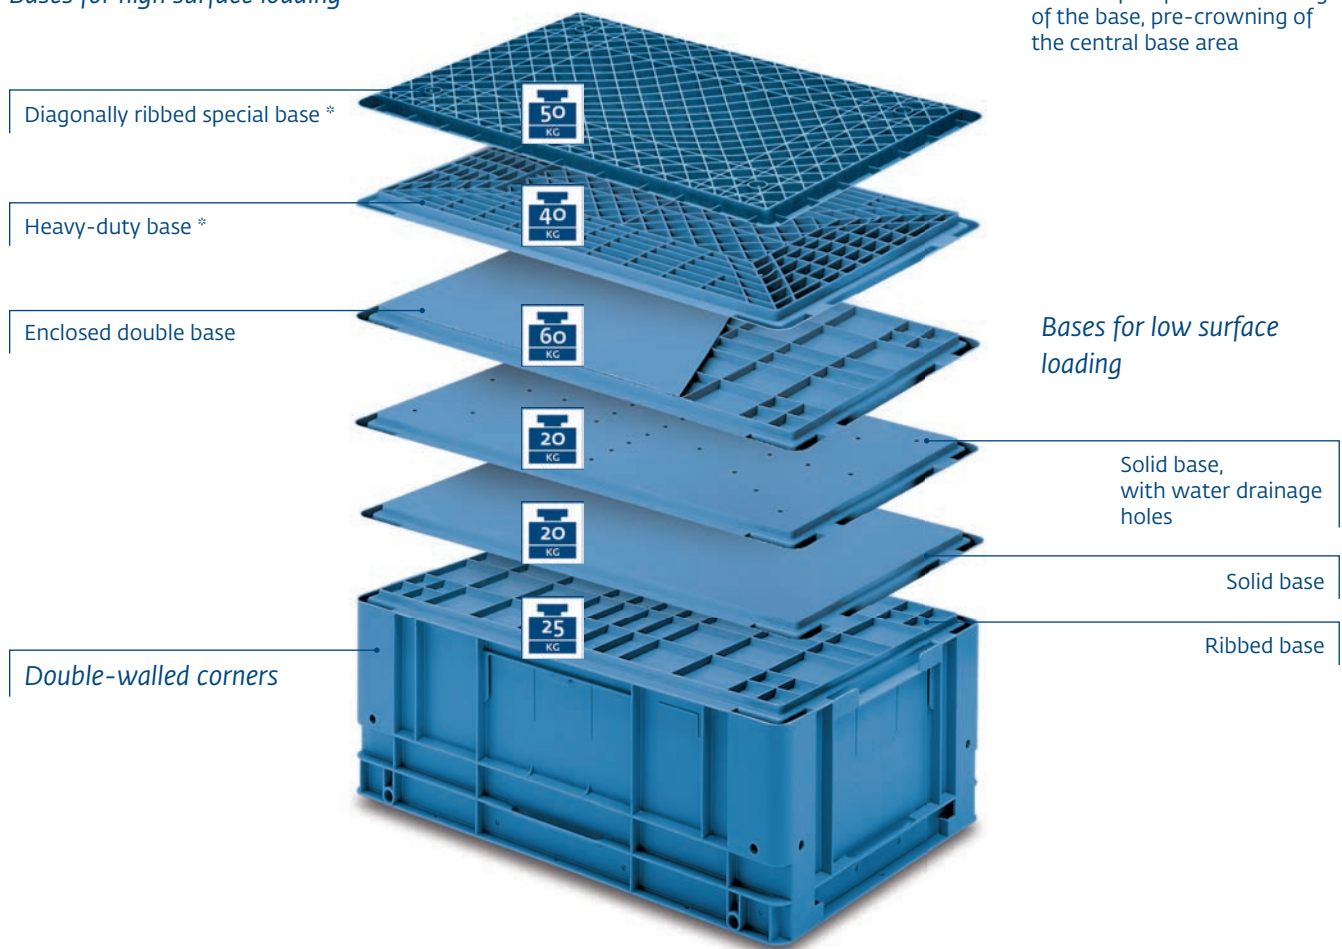


Solid base

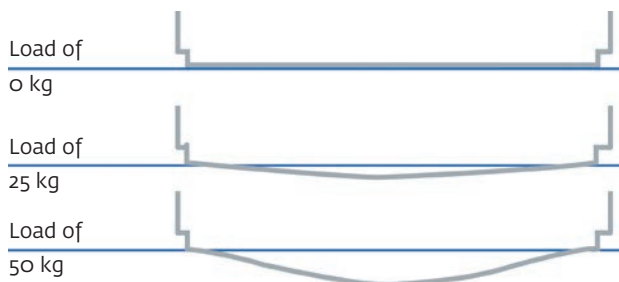

Enclosed double base

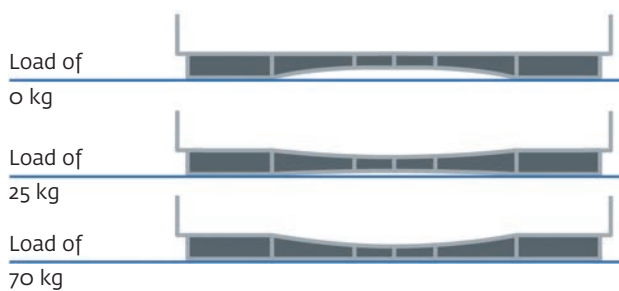

Heavy-duty base

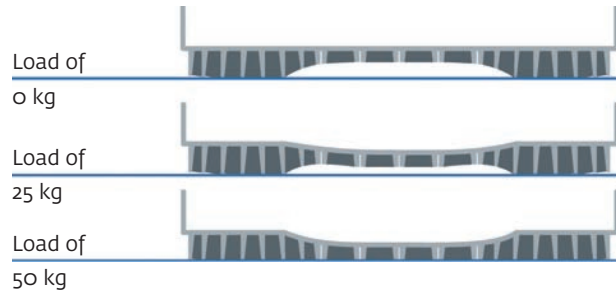



Accessories

Identification

- Barcode(frame)
 - Transponder/RFID-Chips
 - Inmould label
- Can be positioned individually

Label pockets

- With borders on 2 or 3 sides
- For welding on or gluing on

Individual marking

- Hot stamping
- Pad printing
- Thermotransfer printing
- Script inserts
- Inmould labelling
- Foil embossing

For individual models a Template is required.

Adhesive label area

Base dimension **195 x 145 mm**



Height **120 mm**

Internal dimensions base		157 x 107 x 118 mm	
Stacking height		108 mm	
Usable internal height in stack		106 mm	
Volume		2.0 litres	
Weight		0.20 kg	
Article code	U-channel	Base	Handles
5-2112-11	none	solid	handle bar

Base dimension **300 x 200 mm**



Standard colour
pale blue

Height **120 mm**

Internal dimensions base		259 x 159 x 118 mm	
Stacking height		108 mm	
Usable internal height in stack		106 mm	
Volume		4.0 litres	
Weight		0.39 kg	
Article code	U-channel	Base	Handles
5-3212-11	none	solid	handle bar

Base dimension **400 x 300 mm**



Height **80 mm**

Internal dimensions base		354 x 254 x 77 mm	
Stacking height		65 mm	
Usable internal height in stack		63 mm	
Volume		7.0 litres	
Weight		0.75 kg	
Article code	U-channel	Base	Handles
5-4308-0	none	solid	2 shell handles



Standard colour
pale blue

Height **120 mm**

Internal dimensions base		365 x 265 x 105 mm	
Stacking height		108 mm	
Usable internal height in stack		93 mm	
Volume		10.0 litres	
Weight		0.90 kg	
Article code	U-channel	Base	Handles
5-4312-3	none	ribbed	4 shell handles

Container with reinforced base

Weight		1.10 kg	
Article code	U-channel	Base	Handles
5-4312-3-V	none	enclosed double base	4 shell handles

Stock items (SKU), for all other items please request the minimum order quantities.

Base dimension **400 x 300 mm**



Standard colour
pale blue

Height **170 mm**

Internal dimensions base		365 x 265 x 155 mm	
Stacking height		158 mm	
Usable internal height in stack		143 mm	
Volume		15.0 litres	
Weight		1.15 kg	
Article code	U-channel	Base	Handles
5-4317-1	closed	ribbed	2 handle slots
5-4317-2	open	ribbed	4 shell handles
5-4317-3	closed	ribbed	4 shell handles
5-4317-4	open	ribbed	2 handle slots

Containers with reinforced base

Weight		1.39 kg	
Article code	U-channel	Base	Handles
5-4317-1-V	closed	enclosed double base	2 handle slots
5-4317-2-V	open	enclosed double base	4 shell handles
5-4317-3-V	closed	enclosed double base	4 shell handles
5-4317-4-V	open	enclosed double base	2 handle slots
5-4317-20	closed	heavy-duty b. 17 mm	4 shell handles
5-4317-21	closed	heavy-duty b. 17 mm	2 handle slots
5-4317-22	open	heavy-duty b. 17 mm	4 shell handles
5-4317-24	open	heavy-duty b. 17 mm	2 handle slots



Standard colour
pale blue

Height **220 mm**

Internal dimensions base		365 x 265 x 205 mm	
Stacking height		208 mm	
Usable internal height in stack		193 mm	
Volume		20.0 litres	
Weight		1.33 kg	
Article code	U-channel	Base	Handles
5-4322N-1	closed	ribbed	2 handle slots
5-4322N-2	open	ribbed	4 shell handles
5-4322N-3	closed	ribbed	4 shell handles
5-4322N-4	open	ribbed	2 handle slots
5-4322N-303	closed	solid	4 shell handles

Containers with reinforced base

Weight		1.58 kg	
Article code	U-channel	Base	Handles
5-4322N-1-V	closed	enclosed double base	2 handle slots
5-4322N-2-V	open	enclosed double base	4 shell handles
5-4322N-3-V	closed	enclosed double base	4 shell handles
5-4322N-4-V	open	enclosed double base	2 handle slots
5-4322N-20	closed	heavy-duty b. 17 mm	4 shell handles
5-4322N-21	closed	heavy-duty b. 17 mm	2 handle slots
5-4322N-22	open	heavy-duty b. 17 mm	4 shell handles
5-4322N-24	open	heavy-duty b. 17 mm	2 handle slots

Stock items (SKU), for all other items please request the minimum order quantities.

Base dimension **400 x 300 mm**



Height **220 mm**

Internal dimensions base		365 x 265 x 205 mm	
Stacking height		208 mm	
Usable internal height in stack		193 mm	
Volume		20.0 litres	
Weight		1.24 kg	
Access opening		110 x 200 mm	
Article code	U-channel	Base	Handles
5-4322N-590	closed	solid	1 handle slot

Base dimension **600 x 400 mm**



Height **80 mm**

Internal dimensions base		565 x 365 x 66 mm	
Stacking height		69 mm	
Usable internal height in stack		55 mm	
Volume		14.0 litres	
Weight		1.26 kg	
Article code	U-channel	Base	Handles
5-6408-524	none	ribbed	4 shell handles

Container with reinforced base

Weight		1.59 kg	
Article code	U-channel	Base	Handles
5-6408-524-V	none	enclosed double base	4 shell handles



Standard colour
pale blue

Height **120 mm**

Internal dimensions base		565 x 365 x 105 mm	
Stacking height		108 mm	
Usable internal height in stack		93 mm	
Volume		21.0 litres	
Weight		1.60 kg	
Article code	U-channel	Base	Handles
5-6412N-3	none	ribbed	4 shell handles

Containers with reinforced base

Weight		1.95 kg	
Article code	U-channel	Base	Handles
5-6412N-3-V	none	enclosed double base	4 shell handles
5-6412N-20	none	heavy-duty b. 17 mm	4 shell handles

Stock items (SKU), for all other items please request the minimum order quantities.

Base dimension **600 x 400 mm**



Height 120 mm

Internal dimensions base		566 x 366 x 105 mm	
Stacking height		108 mm	
Usable internal height in stack		93 mm	
Volume		18.0 litres	
Weight		1.80 kg	
Special version		1 short side with sliding wall	
Article code	U-channel	Base	Handles
5-6412-650	none	enclosed double base, water drain holes	2 shell handles



Height 120 mm

Internal dimensions base		568 x 368 x 104 mm	
Stacking height		107 mm	
Usable internal height in stack		89 mm	
Volume		22.0 litres	
Weight		1.30 kg	
Article code	U-channel	Base	Handles
15-6412-0	none	ribbed	2 shell handles
15-6412-25	none	ribbed	2 handle slots

Container with reinforced base

Weight		1.7 kg	
Article code	U-channel	Base	Handles
15-6412-3-V	none	enclosed double base	2 shell handles



Height 150 mm

Internal dimensions base		565 x 365 x 127 mm	
Stacking height		136 mm	
Usable internal height in stack		113 mm	
Volume		26.0 litres	
Weight		1.50 kg	
Article code	U-channel	Base	Handles
15-6415-0	none	ribbed	2 shell handles
15-6415-25	none	ribbed	2 handle slots

Container with reinforced base

Weight		2.08 kg	
Article code	U-channel	Base	Handles
15-6415-150	none	heavy-duty b. 20 mm	2 shell handles

Base dimension **600 x 400 mm**



Standard colour
pale blue

Height **170 mm**

Internal dimensions base		565 x 365 x 155 mm	
Stacking height		158 mm	
Usable internal height in stack		143 mm	
Volume		32.0 litres	
Weight		1.76 kg	
Article code	U-channel	Base	Handles
5-6417N-1	closed	ribbed	2 handle slots
5-6417N-2	open	ribbed	4 shell handles
5-6417N-3	closed	ribbed	4 shell handles
5-6417N-4	open	ribbed	2 handle slots
5-6417-303	closed	solid	4 shell handles

Containers with reinforced base

Weight		2.14 kg	
Article code	U-channel	Base	Handles
5-6417N-1-V	closed	enclosed double base	2 handle slots
5-6417N-2-V	open	enclosed double base	4 shell handles
5-6417N-3-V	closed	enclosed double base	4 shell handles
5-6417N-4-V	open	enclosed double base	2 handle slots
5-6417N-80	closed	heavy-duty b. 20 mm	4 shell handles
5-6417N-81	closed	heavy-duty b. 20 mm	2 handle slots
5-6417N-82	open	heavy-duty b. 20 mm	4 shell handles
5-6417N-84	open	heavy-duty b. 20 mm	2 handle slots



Height **200 mm**

Innenmasse oben		566 x 366 mm	
Internal dimensions base		565 x 365 x 183 mm	
Stacking height		186 mm	
Usable internal height in stack		169 mm	
Volume		37.5 litres	
Weight		2.07 kg	
Article code	U-channel	Base	Handles
15-6420-0	none	ribbed	2 shell handles
15-6420-25	none	ribbed	2 handle slots
15-6420-400 *	none	ribbed	2 shell handles
15-6420-425 *	none	ribbed	2 handle slots

Containers with reinforced base

Weight		2.35 kg	
Article code	U-channel	Base	Handles
15-6420-0-V	none	enclosed double base	2 shell handles
15-6420-150	none	heavy-duty b. 20 mm	2 shell handles

* = sidewalls: long sides solid, short sides perforated

Stock items (SKU), for all other items please request the minimum order quantities.

Base dimension **600 x 400 mm**



Standard colour
pale blue

Height **220 mm**

Internal dimensions base		565 x 365 x 205 mm	
Stacking height		208 mm	
Usable internal height in stack		193 mm	
Volume		42.0 litres	
Weight		2.14 kg	
Article code	U-channel	Base	Handles
5-6422N-1	closed	ribbed	2 handle slots
5-6422N-2	open	ribbed	4 shell handles
5-6422N-3	closed	ribbed	4 shell handles
5-6422N-4	open	ribbed	2 handle slots

Containers with reinforced base

Weight		2.51 kg	
Article code	U-channel	Base	Handles
5-6422N-1-V	closed	enclosed double base	2 handle slots
5-6422N-2-V	open	enclosed double base	4 shell handles
5-6422N-3-V	closed	enclosed double base	4 shell handles
5-6422N-4-V	open	enclosed double base	2 handle slots
5-6422N-80	closed	heavy-duty b. 20 mm	4 shell handles
5-6422N-81	closed	heavy-duty b. 20 mm	2 handle slots
5-6422N-82	open	heavy-duty b. 20 mm	4 shell handles
5-6422N-83	open	heavy-duty b. 20 mm	2 shell handles



Height **220 mm**

Internal dimensions base		568 x 368 x 204 mm	
Stacking height		207 mm	
Usable internal height in stack		189 mm	
Volume		43.0 litres	
Weight		2.30 kg	
Article code	U-channel	Base	Handles
15-6422-0	none	ribbed	2 shell handles
15-6422-25	none	ribbed	2 handle slots

Stock items (SKU), for all other items please request the minimum order quantities.

Base dimension **600 x 400 mm**



Height 220 mm

Internal dimensions base	565 x 365 x 205 mm		
Stacking height	208 mm		
Usable internal height in stack	193 mm		
Volume	42.0 litres		
Weight	2.14 kg		
Guide notches	1 each on the longitudinal and short walls		
Article code	U-channel	Base	Handles
5-6422N-582	closed	ribbed	4 shell handles

Partition panels

Article code	External dimensions	Position
80-6530-1	564 x 190 x 3 mm	lengthwise
80-6530-2	364 x 190 x 3 mm	crosswise




Height 220 mm

Internal dimensions base	565 x 365 x 205 mm		
Stacking height	208 mm		
Usable internal height in stack	193 mm		
Volume	42.0 litres		
Weight	2.56 kg		
Guide notches, protruding	3 on both longitudinal walls		
Article code	U-channel	Base	Handles
5-6422N-561	closed	heavy-duty b. 20 mm	4 shell handles

Partition panel

Article code	External dimensions	Position
26-3-0084	364 x 175 x 3 mm	crosswise

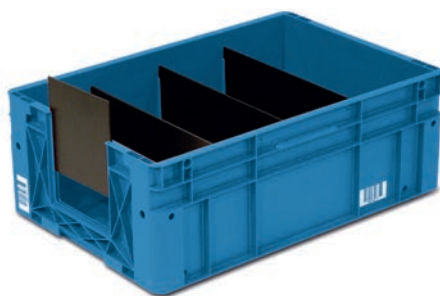

Height 220 mm

Internal dimensions base	565 x 365 x 205 mm		
Stacking height	208 mm		
Usable internal height in stack	193 mm		
Volume	42.0 litres		
Weight	2.43 kg		
Guide notches, protruding	3 on both longitudinal walls		
Article code	U-channel	Base	Handles
5-6422N-576	closed	heavy-duty b. 16 mm	3 shell handles

Partition panel

Article code	External dimensions	Position
26-3-0106	364 x 185 x 3 mm	crosswise

Slide in panel for front opening

Article code	External dimensions
26-3-0107	157 x 157 x 3 mm

Base dimension **600 x 400 mm**



Height 220 mm

Internal dimensions base		566 x 366 x 197 mm	
Stacking height		208 mm	
Usable internal height in stack		185 mm	
Volume		40.0 litres	
Weight		2.70 kg	
Guide notches, recessed		3 on the longitudinal walls, 1 on the short wall	
Article code	U-channel	Base	Handles
55-6040A-220 R	none	diagonally ribbed special base	4 shell handles

Partition panels

Article code	External dimensions	Execution	Position
55-6000A-220-01	578 x 184 x 9 mm	with 5 guide slots	lengthwise
55-6000A-220-11	578 x 184 x 9 mm	with 3 guide slots	lengthwise
55-4000A-220-01	378 x 184 x 9 mm	with 1 guide slot	crosswise



Height 265 mm

Internal dimensions base		565 x 365 x 250 mm	
Stacking height		252 mm	
Usable internal height in stack		237 mm	
Volume		52.0 litres	
Weight		2.51 kg	
Article code	U-channel	Base	Handles
5-6427N-1	closed	ribbed	2 handle slots
5-6427N-2	open	ribbed	4 shell handles
5-6427N-3	closed	ribbed	4 shell handles
5-6427N-4	open	ribbed	2 handle slots
5-6427-303	closed	solid	4 shell handles

Containers with reinforced base

Weight		2.89 kg	
Article code	U-channel	Base	Handles
5-6427N-1-V	closed	enclosed double base	2 handle slots
5-6427N-2-V	open	enclosed double base	4 shell handles
5-6427N-3-V	closed	enclosed double base	4 shell handles
5-6427N-4-V	open	enclosed double base	2 handle slots

Height 268 mm

Containers with reinforced base

Internal dimensions base		565 x 365 x 245 mm	
Stacking height		255 mm	
Usable internal height in stack		232 mm	
Volume		52.0 litres	
Weight		2.88 kg	
Article code	U-channel	Base	Handles
5-6427N-80	closed	heavy-duty b. 20 mm	4 shell handles
5-6427N-81	closed	heavy-duty b. 20 mm	2 handle slots
5-6427N-82	open	heavy-duty b. 20 mm	4 shell handles
5-6427N-84	open	heavy-duty b. 20 mm	2 handle slots



Article code with **R** =
made of UIC® recycled material

Base dimension **600 x 400 mm**



Height 270 mm

Internal dimensions base		568 x 368 x 253 mm	
Stacking height		256 mm	
Usable internal height in stack		238 mm	
Volume		53.0 litres	
Weight		2.40 kg	
Article code	U-channel	Base	Handles
15-6427-0	none	ribbed	2 shell handles
15-6427-25	none	ribbed	2 handle slots

Height 270 mm

Internal dimensions base		566 x 366 x 251 mm	
Stacking height		254 mm	
Usable internal height in stack		235 mm	
Volume		52.0 litres	
Weight		2.35 kg	
Guide notches, recessed		5 on the longitudinal walls, 1 on the short wall	
Article code	U-channel	Base	Handles
55-6040A-270-1 R	none	ribbed	4 shell handles
55-6040A-270-1-V R	none	enclosed double base	4 shell handles

Partition panels

Article code	External dimensions	Execution	Position
55-6000A-270-01	578 x 243 x 9 mm	with 5 guide slots	lengthwise
55-4000A-270-11	378 x 243 x 9 mm	with 1 guide slot	crosswise



Height 280 mm

Internal dimensions top		567 x 367 mm	
Internal dimensions base		565 x 365 x 263 mm	
Stacking height		266 mm	
Usable internal height in stack		249 mm	
Volume		54.0 litres	
Weight		2.50 kg	
Article code	U-channel	Base	Handles
15-6428-0	none	ribbed	2 shell handles
15-6428-25	none	ribbed	2 handle slots

Containers with reinforced base

Weight		2.88 kg	
Article code	U-channel	Base	Handles
15-6428-0-V	none	enclosed double base	2 shell handles
15-6428-575	none	heavy-duty b. 20 mm	2 handle slots

Oeco-line

Article code with **R** =
made of UIC® recycled material

Base dimension **600 x 400 mm**



Standard colour
pale blue

Also available with heavy-duty base 23 mm.



Height **320 mm**

Internal dimensions base		565 x 365 x 305 mm	
Stacking height		308 mm	
Usable internal height in stack		293 mm	
Volume		63.0 litres	
Weight		2.85 kg	
Article code	U-channel	Base	Handles
5-6432N-1	closed	ribbed	2 handle slots
5-6432N-2	open	ribbed	4 shell handles
5-6432N-3	closed	ribbed	4 shell handles
5-6432N-4	open	ribbed	2 handle slots

Containers with reinforced base

Weight		3.28 kg	
Article code	U-channel	Base	Handles
5-6432N-1-V	closed	enclosed double base	2 handle slots
5-6432N-2-V	open	enclosed double base	4 shell handles
5-6432N-3-V	closed	enclosed double base	4 shell handles
5-6432N-4-V	open	enclosed double base	2 handle slots
5-6432N-20	closed	heavy-duty b. 17 mm	4 shell handles
5-6432N-21	closed	heavy-duty b. 17 mm	2 handle slots
5-6432N-22	open	heavy-duty b. 17 mm	4 shell handles
5-6432N-24	open	heavy-duty b. 17 mm	2 handle slots

Height **320 mm**

Internal dimension top		567 x 367 mm	
Internal dimensions base		565 x 365 x 303 mm	
Stacking height		306 mm	
Usable internal height in stack		289 mm	
Volume		63.0 litres	
Weight		2.70 kg	
Article code	U-channel	Base	Handles
15-6432-0	none	ribbed	2 shell handles
15-6432-25	none	ribbed	2 handle slots

Containers with reinforced base

Weight		3.00 kg	
Article code	U-channel	Base	Handles
15-6432N-0-V	none	enclosed double base	2 shell handles
15-6432N-575	none	heavy-duty b. 20 mm	2 handle slots

Height **320 mm**

Internal dimensions base		569 x 369 x 304 mm	
Stacking height		308 mm	
Usable internal height in stack		290 mm	
Volume		63.0 litres	
Weight		2.60 kg	
Special version		1 short side with sliding wall	
Article code	U-channel	Base	Handles
15-6432-650	none	enclosed double base, water drainage holes	2 handle slots

Base dimension **600 x 400 mm**



Height 320 mm

Internal dimensions base		565 x 365 x 303.5 mm	
Stacking height		308 mm	
Usable internal height in stack		291.5 mm	
Volume		62.0 litres	
Weight		2.99 kg	
Guide notches, recessed		5 on the longitudinal walls, 1 on the short wall	
Article code	U-channel	Base	Handles
55-6040A-320-V R	none	enclosed double base	4 shell handles

Partition panels

Article code	External dimensions	Execution	Position
55-6000A-320-21	578 x 290 x 9 mm	with 5 guide slots	lengthwise
55-6000A-320-22	578 x 290 x 9 mm	with 2 guide slots	lengthwise
55-6000A-320-23	578 x 290 x 9 mm	with 3 guide slots	lengthwise
55-6000A-320-24	578 x 290 x 9 mm	with 3 guide slot	lengthwise
55-4000A-320-21	378 x 290 x 9 mm	with 1 guide slot	crosswise



Height 320 mm

Internal dimensions base		565 x 365 x 297.5 mm	
Stacking height		308 mm	
Usable internal height in stack		291.5 mm	
Volume		62.0 litres	
Weight		3.30 kg	
Guide notches, recessed		5 on the longitudinal walls, 1 on the short wall	
Article code	U-channel	Base	Handles
55-6040A-320-4 R	none	diagonally ribbed	4 shell handles

Partition panels

Article code	External dimensions	Execution	Position
55-6000A-320-1	578 x 284 x 9 mm	with 5 guide slots	lengthwise
55-6000A-320-2	578 x 290 x 9 mm	with 2 guide slots	lengthwise
55-6000A-320-3	578 x 290 x 9 mm	with 3 guide slots	lengthwise
55-6000A-320-4	578 x 290 x 9 mm	with 3 guide slot	lengthwise
55-4000A-320-1	378 x 290 x 9 mm	with 1 guide slot	crosswise

Base dimension **600 x 400 mm**



Height 370 mm

Internal dimensions base		565 x 365 x 355 mm	
Stacking height		358 mm	
Usable internal height in stack		343 mm	
Volume		73.2 litres	
Weight		3.15 kg	
Article code	U-channel	Base	Handles
5-6437N-0	closed	ribbed	4 shell handles
5-6437N-1	open	ribbed	2 handle slots
5-6437N-2	open	ribbed	4 shell handles
5-6437N-3	closed	ribbed	4 shell handles
5-6437N-4	open	ribbed	2 handle slots

Containers with reinforced base

Weight		3.50 kg	
Article code	U-channel	Base	Handles
5-6437N-80	closed	heavy-duty b. 20 mm	4 shell handles
5-6437N-81	closed	heavy-duty b. 20 mm	2 handle slots
5-6437N-82	open	heavy-duty b. 20 mm	4 shell handles
5-6437N-83	closed	heavy-duty b. 20 mm	4 shell handles
5-6437N-84	open	heavy-duty b. 20 mm	2 handle slots



Height 420 mm

Internal dimensions base		565 x 365 x 405 mm	
Stacking height		408 mm	
Usable internal height in stack		393 mm	
Volume		84.0 litres	
Weight		3.66 kg	
Article code	U-channel	Base	Handles
5-6442-2	open	ribbed	4 shell handles
5-6442-3	closed	ribbed	4 shell handles
5-6442-4	open	ribbed	2 handle slots
5-6442-7	closed	ribbed	2 handle slots

Containers with reinforced base

Weight		4.03 kg	
Article code	U-channel	Base	Handles
5-6442-2-V	open	enclosed double base	4 shell handles
5-6442-3-V	closed	enclosed double base	4 shell handles
5-6442-4-V	open	enclosed double base	2 handle slots
5-6442-7-V	closed	enclosed double base	2 handle slots
5-6442-20	closed	heavy-duty b. 17 mm	4 shell handles
5-6442-21	closed	heavy-duty b. 17 mm	2 handle slots
5-6442-22	open	heavy-duty b. 17 mm	4 shell handles
5-6442-24	open	heavy-duty b. 17 mm	2 handle slots

Base dimension **650 x 450 mm**



Height **420 mm**

Container with reinforced base

Internal dimensions base		568 x 368 x 403 mm	
Stacking height		406 mm	
Usable internal height in stack		389 mm	
Volume		84.0 litres	
Weight		4.03 kg	
Article code	U-channel	Base	Handles
15-6442-3-V	none	enclosed double base	2 handle slots

Height **220 mm**

Internal dimensions base		613 x 413 x 190 mm	
Stacking height		207 mm	
Usable internal height in stack		190 mm	
Volume		48.0 litres	
Weight		2.80 kg	
Guide notches, recessed		5 on the longitudinal walls, 1 on the short wall	
Article code	U-channel	Base	Handles
55-6545F-0220-2	none	enclosed double base	4 shell handles

Partition panels

Article code	External dimensions	Execution	Position
55-6500F-0220	628 x 184 x 9.5 mm	with 5 guide slots	lengthwise
55-4500F-0220	428 x 184 x 9.5 mm	with 1 guide slot	crosswise

Height **320 mm**

Internal dimensions base		613 x 413 x 290 mm	
Stacking height		307 mm	
Usable internal height in stack		290 mm	
Volume		73.0 litres	
Weight		3.42 kg	
Guide notches, recessed		5 on the longitudinal walls, 1 on the short wall	
Article code	U-channel	Base	Handles
55-6545F-0320-2	none	enclosed double base	4 shell handles

Partition panels

Article code	External dimensions	Execution	Position
55-6500F-0320	628 x 284 x 9.5 mm	with 5 guide slots	lengthwise
55-4500F-0320	428 x 284 x 9.5 mm	with 1 guide slot	crosswise

Lids for EUROTEC



3-215Z-0

3-215Z-1-11

54-3020-0

20-2065.1



3-214Z-0

3-924-3-11

20-2064-Z

20-2130

Base dimension **200 x 150 mm**

Article code	Model
3-944-0	loose lid

Base dimension **300 x 200 mm**

Article code	Model
3-215Z-0	loose lid
3-215Z-1-11	hinged lid with snap locks
54-3020-0	loose lid
20-2065.1	dust cover, thermoformed, wall thickness 0,5 mm

Base dimension **400 x 300 mm**

Article code	Model
3-214Z-0	loose lid
3-924-3-11	slip lid with hooks and snap locks (4 spring-loaded catches 89-7-009 required) lid not suitable for EUROTEC 5-4317
* 20-2064-Z	dust cover, thermoformed, wall thickness 0.8 mm
* 20-2130	loose lid, thermoformed, wall thickness 2 mm

Standard colours

	dark grey
	dark blue
	transparent

Stock items (SKU), for all other items please request the minimum order quantities.

Lids for EUROTEC



3-925-5
3-923-4-11
3-213Z-0
3-213Z-1-11
20-2007.1
21-2895-1



Base dimension **600 x 400 mm**

Article code	Model
3-925-5	slip lid
3-923-4-11	slip lid with hooks and snap locks (4 adapters 89-7-009 required)
3-213Z-0	loose lid
3-213Z-1-11	hinged lid with snap locks (suitable only for EUROTEC 15-6415-152 and 15-6428-0)
3-213Z-1-255-11	hinged lid with snap locks (suitable only for EUROTEC 15-6415-152 and 15-6428-0)
* 20-2007.1	dust cover, thermoformed, wall thickness 1 mm
21-2895-1	loose lid, thermoformed, wall thickness 2.5 mm

Adapter for snap locks

Article code	Remark
89-7-009	to attach the lid to the container (4 adapters required), to fit lid 3-923-4-11 and 3-923-4-11

Cover for EUROTEC



21-0751

Base dimension **800 x 600 mm**

Article code	Model
20-2103-2	cover, thermoformed, wall thickness 4 mm

Base dimension **1200 x 800 mm**

Article code	Model
20-0751	cover, thermoformed, wall thickness 3 mm

Base dimension **1200 x 1000 mm**

Article code	Model
21-0780-1	cover, thermoformed, wall thickness 5 mm

Standard colours

	dark grey
*	transparent
	translucent natural
	pale blue
	dark blue
	scarlet
	yellow
	black

Stock items (SKU), for all other items please
request the minimum order quantities.

Removable boxes



For base dimension 400 x 300 mm

suitable for 120 mm container height

Article code	Article	External dimensions	Size
3-910	container	130 x 91 x 88 mm	 1/8
3-909	container	182 x 130 x 88 mm	 1/4
3-908	container	260 x 182 x 88	 1/2

For base dimension 600 x 400 mm

suitable for 120 mm container height

Article code	Article	External dimensions	Size
3-907-2	container	95 x 92 x 80 mm	 1/24

suitable for 170 mm container height

Article code	Article	External dimensions	Size
3-905-2	container	189 x 92 x 150 mm	 1/12
3-906-2	container	189 x 184 x 150 mm	 1/6

suitable for 120 mm container height

Article code	Article	External dimensions	Size
3-996	container	142 x 92 x 80 mm	 1/16
3-995	container	284 x 184 x 80 mm	 1/4

Removable boxes



Standard colour container light grey lid transparent



Standard colour
light grey



For base dimension 600 x 400 mm

suitable for 120 mm container height

Article code	Article	External dimensions	Size
3-939N-42	container	139 x 89 x 99 mm	 1/16
20-2117	lid	138 x 88 mm	
3-903N-43	container	177 x 139 x 88 mm	 1/8
20-2116	lid	177 x 139 mm	
3-902N-43	container	277 x 177 x 99 mm	 1/4
20-2115	lid	277 x 177 mm	
3-901N-43	container	355 x 277 x 99 mm	 1/2
20-2114	lid	355 x 277 mm	

suitable for 278 mm container height

Article code	Article	External dimensions	Size
3-922-3	container	277 x 177 x 230 mm	 1/4

suitable for 120 mm container height

Article code	Article	External dimensions	Size
3-930-2	container	555 x 89 x 99 mm	 1/4
3-929-3	container	555 x 177 x 99 mm	 1/2
20-2118	lid	553 x 177 mm	

suitable for 120 mm container height

Article code	Article	External dimensions	Size
20-2155	container	181 x 140 x 91 mm	 1/8
20-2154	container, with 1 guide slot for partition panel	281 x 181 x 91 mm	 1/2
20-2153	container, with 1 guide slot for partition panel	363 x 281 x 91 mm	 1/2
20-2152	container, with 3 guide slots for partition panels	563 x 181 x 91 mm	 1/2
26-3-170-80	partition panel to fit articles 20-2152 and 20-2154		
26-3-270-80	partition panel to fit article 20-2153		

Stock items (SKU), for all other items please request the minimum order quantities.

Rubber foam inserts set



Standard colour
dark grey



Material: soft, PU HL 2551

Article code	External dimensions	Set composed of
80-925-11.1	360 x 260 x 62 mm	1 perforated insert 10 mm thickness 2 perforated inserts 20 mm thickness 1 insert for lid 5 adhesive spots
80-925-12.1	360 x 260 x 117 mm	3 perforated inserts 20 mm thickness 1 perforated insert 45 mm thickness 1 insert for lid 5 adhesive spots
80-925-24.1	560 x 360 x 112 mm	3 perforated inserts 20 mm thickness 1 perforated insert 45 mm thickness 1 insert for lid 5 adhesive spots

Stock items (SKU), for all other items please request the minimum order quantities.



*We are a climate-neutral company.
Discover more under www.utzgroup.com*



utzgroup.com

Georg Utz AG • Augraben 2-4 • 5620 Bremgarten • Switzerland
Phone +41 56 648 77 11 • info.ch@utzgroup.com • www.utzgroup.com